


# SYSTEM 5600 2-1/2" CURTAIN WALL



Outside Glazed • 2 or 4-sided Structural Glazed  
 EFCO 2 1/2" system 5600 provides a monumental sight line and is available in a wide range of mullion and face cover depths. The 2 1/2" 5600 pressure wall has roll-on horizontals and concealed fasteners for a smooth uninterrupted joinery. Also Available for enhanced thermal performance and fewer installation steps is a fiberglass pressure plate.

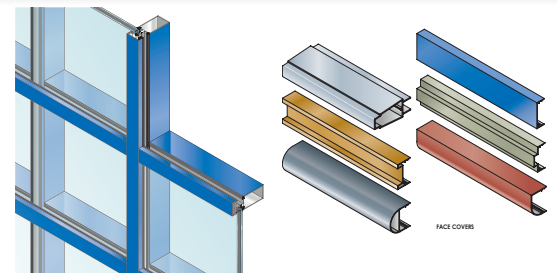

<p><b>STRUCTURAL LOAD</b> (ASTM E330)</p> <p>→ </p> <p>VISIT <a href="http://EFCOCORP.COM">EFCOCORP.COM</a></p>	<p><b>WATER RESISTANCE</b> (ASTM E547 &amp; E331)</p> <p></p> <p>CAPTURED: 15 PSF TARGET</p>
<p><b>AIR INFILTRATION</b> (ASTM E283)</p> <p></p> <p>CAPTURED: &lt;0.06 CFM/FT<sup>2</sup></p>	<p><b>CRF</b> (AAMA 1503)</p> <p></p> <p>DURACAST: 74 SSG: 61</p>
<p><b>U-FACTOR*</b> (ANSI/NFRC 100/200)</p> <p></p> <p>DURACAST: 0.29 - 0.51 ALUMINUM: 0.37 - 0.59 SSG: 0.29 - 0.52</p>	<p><b>OITC*</b> (ASTM E90 &amp; E413)</p> <p></p> <p>DURACAST: 30</p>
<p><b>STC*</b> (ASTM E90 &amp; E413)</p> <p></p> <p>DURACAST: 34 - 36</p>	

## STANDARD FEATURES

- Thermal isolator used between exterior and interior extrusions
- Various mullion depths
- Wide variety of snap-on face covers
- Optional corner mullions
- Concealed shear block construction
- Concealed vents
- Integral door adaptors
- Accommodates up to 1-5/16" glazing
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Anodized and painted finishes available
- Roll-on horizontals

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.